

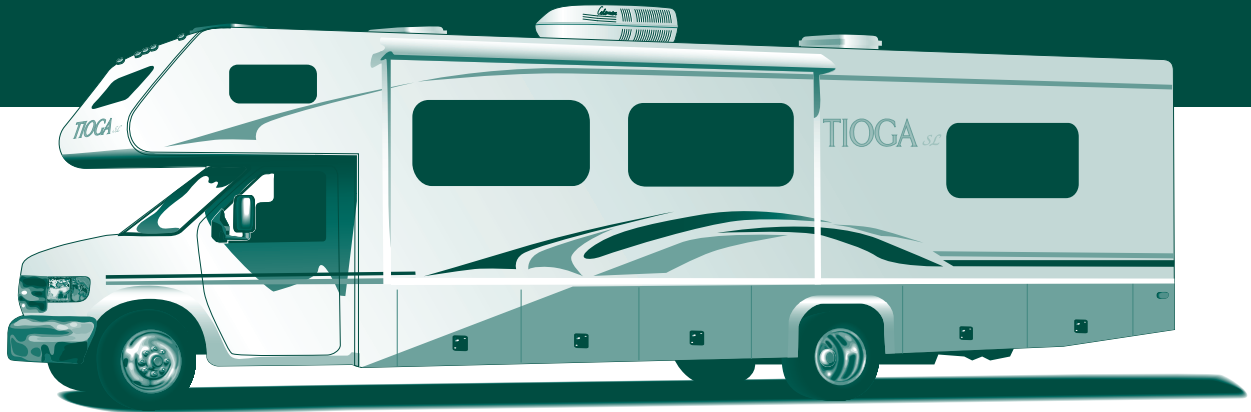


TIOGA[®] SL


FLEETWOOD[®] RV




Model 28R

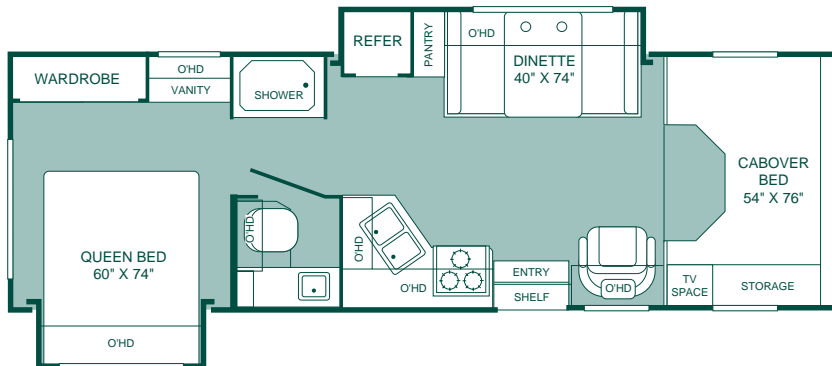

OPT. 351
ENTERTAINMENT CENTER
W/HOME THEATER SYSTEM

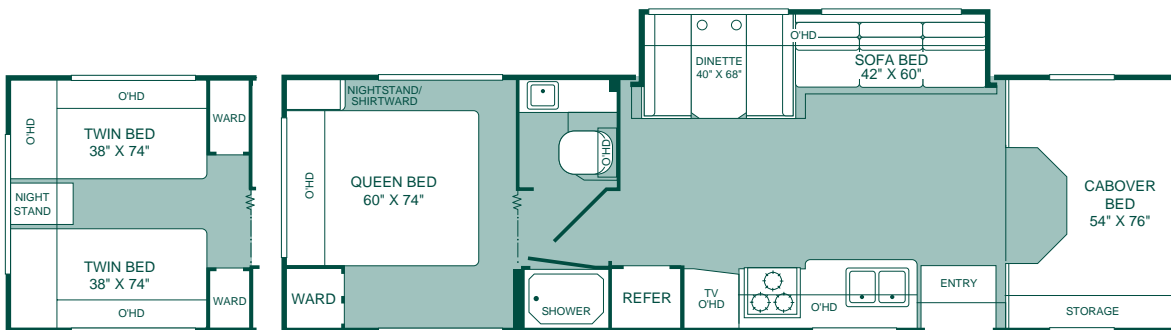

OPT. 835
TWIN BEDS W/NIGHTSTAND



OPT. 351
ENTERTAINMENT CENTER
W/HOME THEATER SYSTEM

Model 31W

FLEETWOOD[®] RV

TOP FEATURES

- Vacu-Bond® Walls with Smooth High-Gloss Tuff Coat™ Fiberglass
- Corrosion Resistant Aluminum Tube Hull Framing
- Crowned Roof with Tuff-Ply™ Covering
- Insulated Aluminum Doors with Strut-Assist Action
- Painted Exterior Skirts
- “Breakaway” Exterior Mirrors with Remote Adjustment and Heat Defrost
- Custom Steel Running Boards
- Centralized Roto-Cast Utility Compartment
- EZ Store™ Slide-Out Storage Compartment
- 4.0 KW Onan® Microquiet Generator
- 15,000 BTU AC with In-Ceiling Ducting
- Dometic Sunchaser Awning
- Auto-Touch Convection Microwave Oven
- Flexsteel® Furniture
- Dometic 8 Cu. Ft. Double Door Refrigerator

AVAILABLE OPTIONS

- Entertainment Center with Panasonic® 27" TV and Home Theater Sound System
- Exterior Entertainment Center with CD Player and Integrated TV Shelf
- In-Dash Panasonic® Stereo AM/FM/CD Player
- Rearview Camera and Monitor
- Satellite Dish with Digital Elevation Sensor
- Flexsteel® Ultraleather™ Bucket Seats

TIOGA®

FLEETWOOD RV

Ford Chassis	28R	31W
Wheelbase	198"	214"
GVWR (lbs) (1)	14,050	14,050
Front GAWR (lbs) (2)	4,600	4,600
Rear GAWR (lbs) (2)	9,450	9,450
Base Weight (lbs) (3)	12,200	12,050
GCWR (lbs) (4)	17,550	17,550
Hitch Rating (lbs)*	3,500	3,500
Tongue Weight (lbs)*	350	350
Fuel Capacity (gal)	55	55

Dimensions and Capacities

Overall Length (5)	28' 11"	31'2"
Overall Height (with A/C)	11' 4"	11'4"
Overall Width (maximum) (6)	102"	102"
Interior Height (maximum)	79"	79"
Interior Width (maximum)	96"	96"
Fresh Water Holding Tank (gal)	37	35
Grey Water Holding Tank (gal)	35	35
Black Water Holding Tank (gal)	40	35
Appliance LPG Tank (gal) (WC) (7)	14	14
Water Heater Tank (gal)	6	6

Liquid Weight Reference

Water (gal/ltrs) = (8.3 lbs/3.8 kgs) Fuel (gal/ltrs) = (6.1 lbs/2.8 kgs)
LPG (gal/ltrs) = (4.2 lbs/1.9 kgs)

Metric Conversion

Multiply pounds x 0.453 to obtain kilograms
Multiply gallons x 3.785 to obtain liters

1. GVWR (Gross Vehicle Weight Rating): Means the maximum permissible loaded weight of the motor home. The GVWR is equal to or greater than the sum of the unloaded vehicle weight plus the net carrying capacity.
2. GAWR (Gross Axle Weight Rating): Means the maximum permissible loaded weight a specific axle is designed to carry.
3. Base Weight: Means the estimated weight of the motor home without fuel, options, water, cargo or passengers.
4. GCWR (Gross Combined Weight Rating): Means the value specified by the motor home manufacturer as the maximum allowable loaded weight of this motor home with its towed vehicle. Towing and braking capacities may differ. Refer to Fleetwood and chassis manufacturer manuals for complete information.
5. Overall length measured from forward most body point or bumper to rear most body point or rear bumper.
Add 5" for rear mounted spare tire – Add 1" for rear ladder – Add 32" for bike rack
6. Excludes safety equipment and awnings.
7. Tank Manufacturer's listed water capacity (WC). Actual LPG capacity is 80% of water listing as required by the safety code.

* The chassis brake manufacturer recommends the installation of a supplemental brake control system to activate the brakes on the vehicle or trailer you are towing.

IMPORTANT—PLEASE READ: Product information, photography and illustrations included in this publication were as accurate as possible at the time of printing. For further product information and changes, please visit our website at www.fleetwoodrv.com or contact your local Fleetwood dealer. Prices, materials, design and specifications are subject to change without notice. All weights, fuel, liquid capacities and dimensions are approximate. Fleetwood has designed its recreational vehicles to provide a variety of uses for its customers. Each vehicle features optimal seating, sleeping, storage and fluid capacities. The user is responsible for selecting the proper combination of loads (i.e. occupants, equipment, fluids, cargo, etc.) to ensure that the vehicle's capacities are not exceeded.